


Tetra[®] LED Systems Power Supply

(GEPS24W-80)

Power Supply Features

- Supports Tetra PowerStrip DS, Tetra miniStrip DS, Tetra EdgeStrip, Tetra Contour and Tetra Contour LS LED lighting systems
- Class 2 wiring per NEC Article 725 (SELV)
- IP66 rated: wet location rated

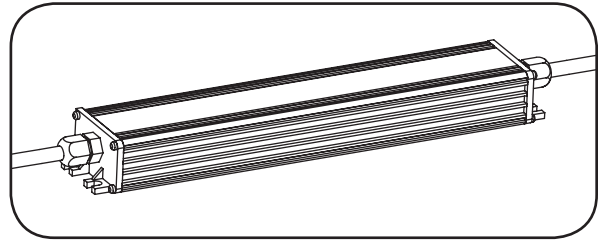

BEFORE YOU BEGIN

Read these instructions completely and carefully.

⚠ WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK:

- Disconnect power at fuse box or circuit breaker before servicing or installing product.
- Properly ground Tetra[®] power supply.

RISK OF FIRE:

- Use only Tetra[®] supply wire to make connection from Tetra[®] power supply to Tetra[®] LED strip.
- Use only approved wire for input/output connection. Minimum size 18 AWG (0.82mm²)
- Follow all local codes.


RISQUES DE DÉCHARGES ÉLECTRIQUES

- Coupez l'alimentation électrique à la boîte de fusibles ou au disjoncteur avant l'entretien ou l'installation du produit.
- Assurez-vous de correctement mettre à terre l'alimentation électrique Tetra[®].


RISQUES D'INCENDIE

- N'utilisez que le fil d'approvisionnement Tetra[®] pour faire la connexion entre l'alimentation Tetra[®] et la bande DEL Tetra[®].
- N'utilisez que des fils approuvés pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.82mm²).
- Respectez tous les codes locaux.


Power Supply Installation

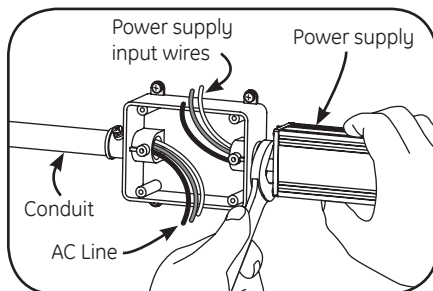

- 1 Run AC line through conduit and attach conduit to outdoor-rated enclosure. Attach power supply to enclosure.

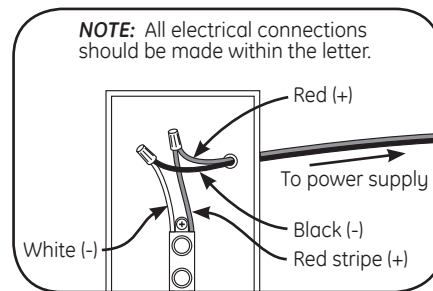


- 2 Connect the red stripe wire (+) of the LED strip to the red wire (+) of the power supply. Connect the white wire (-) of the LED strip to the black wire (-) of the power supply.

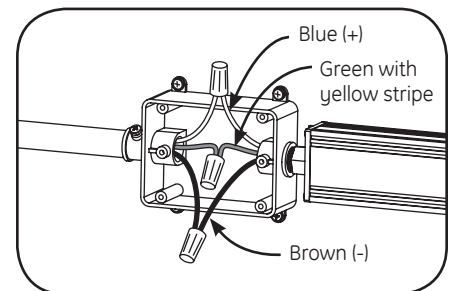


- 3 Connect the AC line to the brown (line) and blue (neutral) input wires of the power supply using 18-14 AWG (0.82-2.08 mm²) twist-on wire connectors. Properly ground (green wire with yellow stripe) power supply in accordance with National Electric Code (NEC) Article 600.



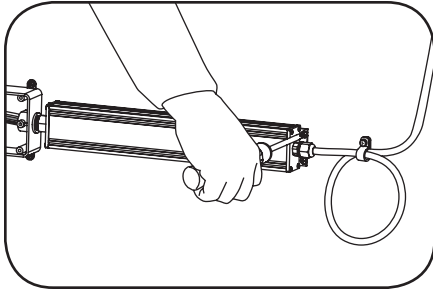

4 Mount power supply in a horizontal orientation with a minimum of one screw per mounting plate (two screws per power supply).

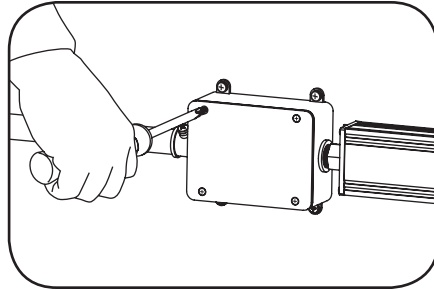

5 Tighten liquid-tight fittings and properly replace cover on junction box to ensure a water-tight seal.

NOTE: Properly ground the power supply and sign in accordance with National Electric Code (NEC 600 and all local codes).

NOTE: For CSA approval, a disconnect/toggle switch of appropriate rating needs to be placed within 29.5 ft. (9 m) of primary side of the power supply. The minimum rating of the switch must be either 120 or 220 Volts AC. The switch must also support twice the amount of input current.

NOTE: When installing power supply, connect to the appropriate sized building breaker or disconnect device for line and neutral connections, in accordance with local, state or country regulations.

Power Supply Specifications

Performance Data	Min	Typical	Max
Input Voltage (VAC)	90	100-240	264
Input Frequency (Hz)	-	50/60	-
Input Current (A)	-	-	1.2
Output Voltage (VDC)	23	24.3	25.6
Output Current (ADC)	-	-	3.3
Output Power (W)	-	-	80
Environmental Operating Temperature Range	-40°C	+25°C	+60°C*
Environmental Humidity (non-condensing)	0%	-	95%
Environmental Storage Temperature Range	-40°C	-	+85°C
Dimensions	12 in. x 2 in. x 1.25 in. (307 mm x 52 mm x 32 mm)		

* Maximum case temperature is 80°C

Supports Tetra Products	SKUs	Maximum Load per Power Supply	Remote Mounting Distance			
			18 AWG/ 0.82 mm ²	16 AWG/ 1.31 mm ²	14 AWG/ 2.08 mm ²	12 AWG/ 3.31 mm ²
Tetra PowerStrip DS	GEWHDSPS6, GEWWDSPS6-50K, GEWWDSPS6-41K, GEWWDSPS6	12 modules/ 16.5 ft. (5.03 m)	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m
Tetra miniStrip DS	GEWHBDP6, GEWWBDP6-50K, GEWWBDP6-41K, GEWWBDP6	31 modules/ 31 ft. (9.45 m)	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m
Tetra EdgeStrip	GEWHBIP2, GEWWBIP2-50K, GEWWBIP2-41K, GEWWBIP2	30 modules/ 30 ft. (9.15 m)	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m
Tetra Contour LS	GEWHXNLA2-WH, GEBLXNLA2-BL, GEGLXNLA2-GL, GERDXNLA2-RD, GEWHXNAA2-WH, GEBLXNAA2-BL, GEGLXNAA2-GL, GERDXNAA2-RD	24 ft. (7.32 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
Tetra Contour	GEWHXNLE1, GEWWXNLE1, GEBLXNLE1, GEGLXNLE1, GERDXNLE1, GERCXNLE1, GEYAXNLE1	24 ft. (7.32 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m

Conforms to the following standards:



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com

1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. Tetra is a trademark of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2012 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

SIGN071-R012412